



“Ext” Series Can Crushers

From *Recycling Equipment Manufacturing, Inc.*

MODEL CC-10 “EXT” HIGH VOLUME CRUSHER FOR USED ALUMINUM BEVERAGE CANS.



REM® proudly introduces our first in a line of third generation can crushers destined to become the product of choice... the Model CC-10 EXT Crusher for aluminum cans. The EXT is a complete separator, crusher, and blower unit capable of processing up to 3,500 pounds of cans per hour!

STATE OF THE ART DESIGN

You’ve never seen anything like it! Equipped with a generous 24” wide belt and 3/4 cubic yard in feed hopper, cans are quickly conveyed across REM’s® powerful magnetic head pulley where ferrous separation occurs. A 16” diameter x 30” wide drum with hardened steel bars crushes the aluminum cans to a density of 6-7 lbs. per cubic foot. Our high performance blower will fill your 40-45’ trailer in only a few hours!



MAXIMIZE YOUR PROFITS

Designed with the customer in mind, the EXT Crusher provides dependable, high volume performance with a minimal investment. Gain that “competitive edge” and maximize your profits. Put the new EXT to work for you today and see how efficient your operation can become. To put our model CC-10 “EXT” to work for you, call **1-800-745-4736**.



"Ext" Series Can Crushers

A Leader in Recycling Equipment Since 1978

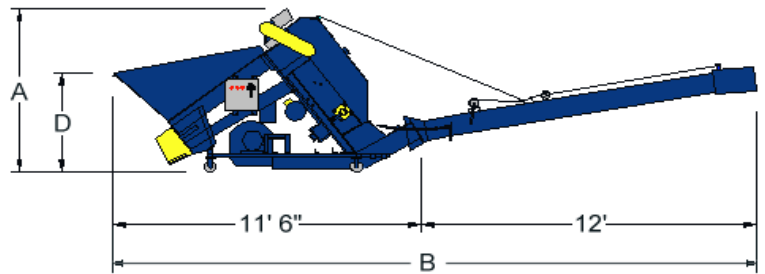

Features:

- Processes up to 3,500 pounds of cans per hour
- Third generation field proven design for high volume, low maintenance, extended life, and easy service
- Crusher drum has hardened steel cleats
- Hopper screen minimizes dirt, debris and moisture
- Enclosed tail pulley cover with external take-ups for correct belt tracking and tension
- REM magnetic head pulley for superior separation
- Low in-feed hopper for easy loading/visual inspection
- High performance blower to fill a 45' trailer
- Enclosed belt and chain guards for user protection
- Blow tube safety restraints

Specifications:

- All-steel unitized construction
- Density of 6-7 lbs. per cubic foot
- PVC-150 conveyor belting with 1-1/2" vulcanized cleats and Flexco 125 Megalloy Lacing
- 3/4 cubic yard in-feed hopper
- 10" diameter adjustable blow-tube with support cable and brake winch
- 8" diameter magnetic head pulley, and 6" diameter crowned tail pulley
- Reversible steel can side-discharge chute
- Enclosed sides and bottom of belt return pan
- 1/2 HP TEFC conveyor motor
- 10 HP crusher / 10 HP blower TEFC motors
- 8" industrial steel casters

Dimensions:	CC - 10 "EXT"
Height (A)	6'
Length (B)	23' 6"
Width (C)	4'
Loading Height (D)	4'
Weight approx. (lbs)	2,600

Electrical :

- 240/480 volt, three phase
- Electrical components are UL listed
- NEMA-4 (hose proof) enclosure
- Sequential manual start motor controls
- Main safety fused disconnect
- Individual motor overload/short circuit protection
- Safety interlock on crusher access door

Options:

- 240 volt, single phase
- 208, 380, 415, 480, or 575 volt, three phase
- Power cord
- Custom conveyors and hoppers
- Replaceable cast chromium crusher drum cleats
- If you don't see it, ask us!

LIMITED ONE YEAR WARRANTY

*All dimensions are nominal +/- 1"

*Specifications subject to change without notice, without incurring responsibility to previous units sold

Recycling Equipment Manufacturing, Inc.

PO Box 310 1-800-745-4736
 Priest River, Idaho www.remfg.com Office: (208) 448-4736
 USA 83856 E-mail: sales@remfg.com Fax: (208) 448-1786

Sales and Service

