



## HDL-2 Hydraulic Lift

From *Recycling Equipment Manufacturing, Inc.*

### HYDRAULIC LIFT FOR DUMPING

Paper, Glass, Mixed Materials



Shown with optional full safety cage

**REM's® Solution to Your  
Container Dumping Problems**

Lift and dump materials from carts, bins, gaylords, etc., with this unique and versatile container lift from REM®. This unit is designed for side loading of materials onto REM's® Model SC Sorting Conveyors, or as a feed for a conveyor, shredder, crusher, or other processing equipment. Simply load containers onto the lift and use the convenient foot switch to elevate to an approximate 35 degree tipping angle (45 degree angle available as an option). REM's® model HDL-2 increases worker productivity, reduces back-strain and lowers contaminant levels from its very first day of operation.

#### **DURABLE CONSTRUCTION**

Built for your most demanding applications, this rugged unit is capable of lifting containers weighing as much as 2,000 lbs.

REM's® unique HD I-Beam frame design is built to reinforce the cylinder support blocks and provide for increased structural integrity. An adjustable retaining rod holds the container in place as it tips.


Containers up to 84" wide can be loaded onto the lift. Discharge heights of up to 72" tall and loads as much as 5,000 lbs. are available.

To put REM's® model HDL-2 Hydraulic Lift to work for you call **1-800-745-4736**.




# HDL-2 Hydraulic Lift


A Leader in Recycling Equipment Since 1978

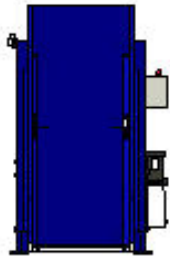

End View

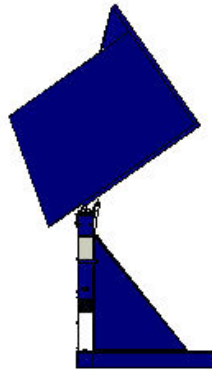

Lift position



Down position

## Features:

- Helps avoid back strain and injury
- Lifts up to 2,000 lbs. (5,000 lbs. capacity available)
- Handles containers up to 50" wide x 55" tall (std)
- Adjustable retaining bar: seven (7) positions from 24" to 55" (standard 44" discharge unit)
- OSHA-required flow-control valves
- Power-up/gravity-down operation (manual check-valve for return to loading position)
- Convenient push-to-start/release-to-stop foot switch with 10' cord for operator convenience and safety
- HD I-Beam frame

## Specifications:

- All-steel construction
- 2.5 GPM/2 hp power pack
- Dual hydraulic cylinders
- Flange mount bearings
- Cycle time under 40 seconds
- Hardened steel bushings at pivot points

## LIMITED ONE YEAR WARRANTY

- \*All dimensions are nominal +/- 1"
- \*Specifications subject to change without notice, without incurring responsibility to previous units sold

Dimensions:	HDL
<b>Standard 44" Discharge Unit</b>	
<b>Height</b>	59"
<b>Length</b>	67"
<b>Width</b>	66"
<b>Approx weight LBS.</b>	1200
<b>Maximum height raised</b>	9' 10"
<b>Discharge height</b>	44"

## Electrical safety features:

- 240/480 volt, three phase
- Electrical components are UL listed
- NEMA-4 (hose proof) enclosure
- Motor overload/short circuit protection

## Options:

- 240 volt single phase
- 208, 380, 415, 480, or 575 volt, three phase
- Power cord
- 45 degree tipping angle power up, power down
- Other power packs available
- Custom container widths up to 84", discharge heights up to 72"
- If you don't see it, ask us!

Recycling Equipment Manufacturing, Inc.

PO Box 310  
 Priest River, Idaho 83856  
 USA

1-800-745-4736  
 Office: (208) 448-4736  
 Fax: (208) 448-1786

www.remfg.com  
 E-mail: sales@remfg.com

Sales and Service